

GROOVED RIVETS



- Aluminum/Steel
- Diameter from 3.2 to 4.8 mm
- Length from 8.0 to 30.0 mm
- Ideal for timeber, plastic or fibrous material application
- The grooves on body expand and bite into materials, create a secure hold
- Used on blind(non-drilled-through) holes, provide a solid and high quality joint




Rivet Diameter /mm	Head Diameter /mm	Head Height /mm	Mandrel Diameter /mm	Mandrel Length /mm	Hole Size /mm	Shear /N	Tensile /N
D1	D2	k	d	p	Drill		
+0.35/-0.00		max.	max.	max.		min.	min.
3.2	5.8-6.5	1.0	1.75	26.00	3.4-3.5	525 N	930 N
4.0	7.5-8.0	1.3	2.15	27.00	4.3-4.4	885 N	1410 N
4.8	9.0-9.5	1.4	2.65	28.00	5.1-5.2	1185 N	1575 N

GROUNDING RIVETS



- Aluminum/Steel
- Diameter 4.0 mm
- Length from 10.0 to 21.0 mm
- Grounding blind rivets provide a straightforward and dependable method for grounding a product. The rivets can easily accommodate the grounding conductor, allowing it to be used with standard cable sockets for effortless grounding.

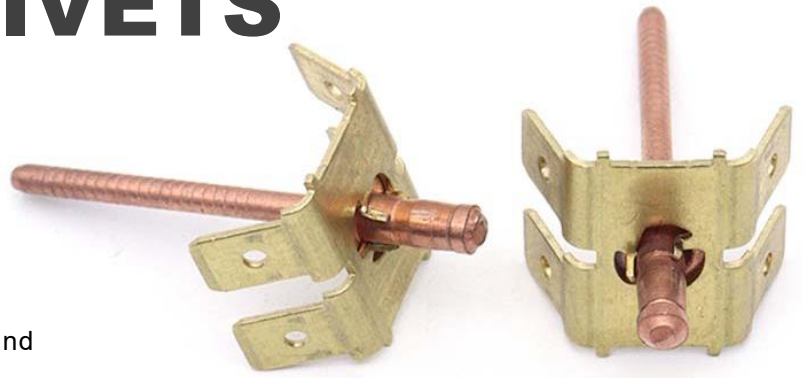

Rivet Diameter /mm	SW	TW	Mandrel Diameter /mm	Mandrel Length /mm	Hole Size /mm	Shear /N	Tensile /N
D1	SW	TW	d	p	DRILL		
+0.08/-0.15	REF.	REF.	REF.	MIN.		MIN.	MIN.
4.0	12.0	8.0	2.30	27.00	5.15-5.20	1300	1900